



INGENUITY

IT CAN BE SAID THAT **INGENUITY** IS THE SPARK BEFORE INNOVATION. IT BEGINS BY IMAGINING SOLUTIONS THAT OTHERS CAN'T SEE. WE SEE INGENUITY IN THE WAY OUR CUSTOMERS DO THEIR JOBS IN UNEXPECTED WAYS.

LIKEWISE, THE PEOPLE AT PELI USE INGENUITY. THAT'S HOW OUR ENGINEERS WERE ABLE TO CREATE THE WORLD'S FIRST DUAL SWITCH LIGHT FOR BOTH PATROL AND TACTICAL USE, AND WHAT LED TO OUR FAVOURITE CREDO: "A GOOD IDEA DOESN'T CARE WHO HAS IT".



> MEET THE OTHER HALF OF PELI

The same durability and ingenuity built into every Peli light also sets our cases apart. We're protecting the world's equipment from the toughest environments.

- Watertight cases for wet conditions
- Weapon cases for military and law enforcement
- Specialised laptop and organisation solutions for off site jobs
- Micro case™ protection for small electronics



FOR THE FULL LINE OF PELI PROTECTOR™ CASES GO TO WWW.PELI.COM

PELI GUARANTEE OF EXCELLENCE

Peli guarantees its products against breakage or defects in workmanship. Peli cases are guaranteed to be watertight to a depth of 1meter for 30 minutes (IP 67) unless otherwise stated if properly closed with undamaged o-ring in place. Peli's liability is limited to the case and not its contents. This guarantee does not cover the lamp or batteries (rechargeable or alkaline) for lights. Any liability, either expressed or implied, is limited to replacement of the product. This guarantee is void if the Peli™ product has been abused beyond normal and sensible wear and tear. This guarantee does not cover shark bite, bear attack or damage caused by children under five.

U.S.A. & GLOBAL HEADQUARTERS
23215 Early Avenue
Torrance, CA 90505 USA
Tel 310.326.4700
800.473.5422 (Outside CA)
Fax 310.326.3311

EUROPE, MIDDLE EAST & AFRICA HQ
PELI PRODUCTS, S.L.
c/ Casp, 33-B Pral.
08010 • Barcelona, Spain
Tel +34 934 674 999
Fax +34 934 877 393
www.peli.com

FRANCE
PELI PRODUCTS FRANCE S.A.S.
487 rue Léopold Le Hon
01000 • Bourg en Bresse, France
Tel +33 4 74 22 80 40
Fax +33 4 74 22 09 34
www.peli.com

GERMANY
PELI PRODUCTS GERMANY GmbH
Graf-Adolf-Platz 15
40213 • Düsseldorf, Germany
Tel +49 (0) 211 882 42 401
Fax +49 (0) 211 882 42 200
www.peli.com

ADVANCED AREA LIGHTING GROUP
PELI AALG LTD.
4 Chater Court
Halifax Drive • Market Deeping
Peterborough PE6 8AH, United Kingdom
Tel +44 (0) 1778 349000
Fax +44 (0) 1778 349004
aalg.peli.com

UAE
PELICAN PRODUCTS
MIDDLE EAST FZE
P.O. Box 10559 • Ras Al Khaimah
United Arab Emirates
Tel +971 (0) 7 2076282
Fax +971 (0) 7 2076283

CANADA
10221-184th Street Edmonton
Alberta T5S 2J4, Canada
Tel 780.481.6076
Fax 780.481.9586

JAPAN
Suntec Bldg. 7F • 2-2-7 Honcho
Funabashi-shi Chiba 273-0005, Japan
Tel +81(0)47433.7715
Fax +81(0)47433.7882

CHINA
Pine City Building • Room 1026
777 Zhaojabang Road
Shanghai, China 200032
Tel +86-21-64189685
Fax +86-21-64189679

AUSTRALIA
Unit 3 • 65-67 Nelson Street
Stepney, South Australia 5069
Tel (08) 8362-6161
Fax (08) 8362-9326


DISTRIBUTED BY:



For further information please visit www.peli.com

> INTRODUCING THE 9430 REMOTE AREA LIGHTING SYSTEMS

The new 9430 Remote Area Lighting System by Peli™ is your complete maintenance free portable lighting solution. With 2000 lumens of bright LED light and up to a 15 hour burn time per charge, you can work anywhere on or off the grid, no generator necessary. Light weight at 10 Kg., the compact 9430 is easy to move up a flight of stairs or into a confined space. At almost 1 meter in extended height with a fully articulating head, illuminating large areas is effortless. A silent, rechargeable sealed lead acid battery and 50,000 hour life LEDs are energy efficient and save money.

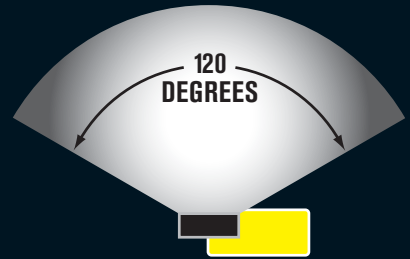


- Built-in handle**
- Fully articulating head**
180° pivoting head
360° rotating head
- Low battery warning system and watertight activation switch**

> LIGHTING TECHNOLOGIES

LED Check the wide variety of torches that Peli currently offers. LED lighting tools are specially designed for the most efficient and durable uses, and with no need for lamp replacement. Plus, LEDs consume very low energy, delivering up to 15 times the burn time compared to incandescent bulbs. If you need an extraordinary powerful beam of light, check Peli's incandescent models.

Furthermore, if you want to benefit from the advantages of both technologies, choose the revolutionary Recoil LED Technology developed by Peli. RECOIL LED Technology: powerful torches, as bright as incandescent lights, with the benefits of the LED (efficiency, no lamp replacement and longer burn time). Visit pe.li.com for further information on these technologies.




> SAFETY APPROVED LIGHTS

Peli™ lights have safety and quality certifications from independent safety organizations from around the world. In Europe they comply with the **ATEX Directives**, obtaining approvals to Zone 0 (Category 1), Zone 1 (Category 2), and Zone 2 (Category 3). Peli Lights are built of ABS Resin, Xenoy®, CNC-machined aluminum, and other special materials which make them extremely resistant to shock, drops, chemicals and other extreme conditions. You can tell it's a Peli Light by its patented faceted body.

Innovations such as our **battery polarity tray** make operating the light impossible if one or more cells are inverted. Available on selected models, this feature safeguards against dangerous "outgassing" from an accidentally reversed cell. In addition to this safety feature, some models include an "umbrella valve", which allows the pressure inside to escape while preventing water from entering. Another industry first is the addition of **Gas-Absorbing Pellets** to Peli™ lamp modules. They are a back-up

system that absorbs excess hydrogen retained inside the light, preventing the risk of an explosion. No gas. No spark. Each light certified by ATEX should have a code printed on its body.



©2009 Peli Products, S.L. All trademarks and logos displayed herein are registered and unregistered trademarks of Peli Products, S.L. and others. EU CODE: 0030-SBL-001E MAR '09
All details included in this brochure are correct when printed but for most updated information please visit www.peli.com



PELI GUARANTEE OF EXCELLENCE



> TOUGH LIGHTING TOOLS
2009 | FULL LINE BROCHURE

> PERSONAL LIGHTS

MityLite™ 1900, VersaBrite™ 2250, MityLite™ 2300, MityLite™ 2340

> MEDIUM DUTY LIGHTS

PeliLite™ 1800, SabreLite™ 2000, StealthLite™ 2400, StealthLite™ Rechargeable 2450, MityLite™ 2430

Photoluminescent 2000PL Shroud

> LIGHT KITS

Emergency Lighting Station 2480, 1940, 1950, 1980

The 2480 ELS houses our MityLite™ 2440 LED Photoluminescent Body (a glow in the dark torch with a photoluminescent body).

L1 LED Knife/Lite Combo, Mini System, Knife/Lite Combo

> TACTICAL LIGHTS

M6 2320, PM6 3320, M9 Rechargeable 7050

> TACTICAL LIGHTS

M11 Rechargeable 8050

> TACTICAL LED LIGHTS

M6 2330 LED, M5 2360 LED, M6 3W 2390 LED, PM6 3330 LED, Rechargeable 7060 LED, Rechargeable 8060 LED

Coming!

> LED RECOIL™ > LEADS AND RECOIL™ LIGHTS

L1 1930 LED, VB3™ 2220 LED, 2365 Flex-Head LED, StealthLite™ 2410 Recoil LED™, StealthLite™ Rechargeable 2460 Recoil LED™, Little Ed™ 3610 Recoil LED™

Coming!

> HEADS UP LIGHTS

HeadUp Lite™ 2620, HeadUp Lite™ 2630 LED, HeadUp Lite™ 2640

> HEADS UP LIGHTS

HeadUp Lite™ 2680 Recoil LED™

> ZONE 1 & 0

L4 1830Z0 Zone 0, MityLite™ 1900Z1 Zone 1, L1 1930Z0 Zone 0 LED, SabreLite™ 2000Z1 Zone 1, SabreLite™ 2010Z1 Zone 1 Recoil LED™, VB3™ 2220Z1 Zone 1 LED, MityLite™ 2340Z1 Zone 1, StealthLite™ 2400Z1 Zone 1, StealthLite™ 2410Z1 Zone 1 Recoil LED, StealthLite™ Rechargeable 2460Z1 Zone 1 Recoil LED, HeadUp Lite™ 2610Z1 Zone 1 LED, HeadUp Lite™ 2690Z0 Zone 0 LED, Little Ed™ 3600Z1 Zone 1, Little Ed™ 3610Z1 Zone 1 Recoil LED, Little Ed™ Rechargeable 3660Z1 Zone 1 Recoil LED™

Photoluminescent 2013PL Shroud

> HEAVY DUTY LIGHTS

LaserPro™ 6000, M13 Rechargeable 6050

> NEMO DIVE SERIES

Nemo™ 1900, Nemo™ 2000, Nemo™ 2010 Recoil LED™, Nemo™ 2400, Nemo™ 4100, Nemo™ 4200, Nemo™ 4300

> REMOTE AREA LIGHTING SYSTEMS

9430, 9450B, 9460, 9470

> SPECIFICATIONS AND FEATURES

CAT. NO	BATTERIES	LAMP	WEIGHT w.b.(g)/ LENGTH (mm)	LUMEN	WATTS	BATTERY BURN TIME hrs.	ATEX (Ex) & RoHS Approvals	COLOURS
1900	2 Alkaline AAA	Xenon	45/104	7	1,1	2		■ ■ ■ ■ ■
2250	2 Alkaline AA	Xenon	85/98	7	1,8	6		■ ■ ■ ■ ■
2300	2 Alkaline AA	Xenon	96/142	8	1,8	4		■ ■ ■ ■ ■
2340	2 Alkaline AA	Xenon	99/158	8	1,8	4		■ ■ ■ ■ ■
1800	2 Alkaline C	Xenon	221/152	15	2,2	8		■ ■ ■ ■ ■
2000	3 Alkaline C	Xenon	363/197	33	3,3	5		■ ■ ■ ■ ■
2400	4 Alkaline AA	Xenon	201/164	25	3,2	4		■ ■ ■ ■ ■
2450	4 Nickel Metal Hydrid AA	Xenon	221/165	28	2,6	4		■ ■ ■ ■ ■
2430	4 Alkaline AA	Xenon	170/165	32	3,7	4	II 2 G EEx ib e IIB T3 IP 6X	■ ■ ■ ■ ■
2480	4 Energizer® e2 Alkaline AA	LED	177/165	33	1,1	90		■ ■ ■ ■ ■
2320	2 Lithium CR123	Xenon	159/140	74	7,8	1		■ ■ ■ ■ ■
3320	2 Lithium CR123	Xenon	98/134	74	7,8	1		■ ■ ■ ■ ■
7050	3 Nickel Cadmium C	Halogen	258/184	122	7,8	1		■ ■ ■ ■ ■
8050	4 Nickel Cadmium C	Xenon	508/285	151	9,1	2		■ ■ ■ ■ ■
2330	2 Lithium CR123	LED	156/140	41	1	40		■ ■ ■ ■ ■
2360	2 AA Alkaline	LED	130/155	100	2,5	10/2,5		■ ■ ■ ■ ■
2390	2 Lithium CR123	LED	159/135	180	3	5		■ ■ ■ ■ ■
3330	2 Lithium CR123	LED	98/134	41	1	40		■ ■ ■ ■ ■
7060	1 3.7 v Ah Lithium-Ion	LED	290/220	130	4,4	1,5		■ ■ ■ ■ ■
8060	4 Nickel Metal Hydrid C	LED	660/322	190	3,7	6		■ ■ ■ ■ ■
1930	4 Alkaline LR 44	LED	25/67	9	0,2	130		■ ■ ■ ■ ■
2220	2 Lithium CR2032	LED	28/89	6	0,6	100	II 2 G EEx ib IIC T6	■ ■ ■ ■ ■
2365	2 Alkaline AA	LED	260/557	45	1	15		■ ■ ■ ■ ■
2410	4 Alkaline AA	Recoil LED	207/177	84	1	32		■ ■ ■ ■ ■
2460	4 Nickel Metal Hydrid AA	Recoil LED	221/177	40	1	32		■ ■ ■ ■ ■
3610	4 Alkaline AA	Recoil LED	297/190	84	1	32		■ ■ ■ ■ ■
2620	3 Alkaline AAA	*Xenon/LED	136/55	**9/14	**0,4/1,5	**80/3	II 3 G EEx n IIC T3X	■ ■ ■ ■ ■
2630	3 Alkaline AA	LED	193/55	**7/15/30	**1/1/1	**24/10/3		■ ■ ■ ■ ■
2640	4 Alkaline AA	*Halogen/LED	309/67	**9/21	**0,5/3,5	**50/3	II 3 G EEx n IIC T3X	■ ■ ■ ■ ■
2680	4 Alkaline AA	Recoil LED	275/118	73	1	33		■ ■ ■ ■ ■
1830Z0	3 Alkaline AAAA	LED	34/157	8	0,7	50	II 1G EEx ia IIB T4	■ ■ ■ ■ ■
1900Z1	2 Alkaline AAA	Xenon	45/104	7	1,1	2	II 2G EEx ia e IIB T5	■ ■ ■ ■ ■
1930Z0	4 Alkaline LR 44	LED	25/67	9	0,2	130	II 1 G EEx ia IIC T4	■ ■ ■ ■ ■
2000Z1	3 Alkaline C	Xenon	363/197	33	3,3	5	II 2 G EEx e ib IIC T4	■ ■ ■ ■ ■
2010Z1	3 Alkaline C	Recoil LED	380/205	60	1	50	II 2G Ex ib IIC T4	■ ■ ■ ■ ■
2220Z1	2 Lithium CR2032	LED	28/89	6	0,6	100	II 2 G EEx ib IIC T6	■ ■ ■ ■ ■
2340Z1	2 Alkaline AA	Xenon	99/158	8	1,8	4	Approval Pending	■ ■ ■ ■ ■
2400Z1	4 Alkaline AA	Xenon	201/164	25	3,2	4	II 2 G EEx e ib IIC T4	■ ■ ■ ■ ■
2410Z1	4 Alkaline AA	Recoil LED	207/177	84	1	32	II 2 G Ex ib IIB T4	■ ■ ■ ■ ■
2460Z1	4 Nickel Metal Hydrid AA	Recoil LED	221/177	40	1	32	II 2 G Ex ib IIC T4	■ ■ ■ ■ ■
2610Z1	3 Alkaline AAA	LED	90/38	**3/9	**0,1/0,4	**150/80	II 2 G EEx ia IIB T4	■ ■ ■ ■ ■
2690Z0	3 Alkaline AAA	LED	80/71	60	1	10	II 1G/D Ex ia IIC T4	■ ■ ■ ■ ■
3600Z1	4 Alkaline AA	Xenon	281/190	25	3,2	4	II 2 G EEx e ib IIC T4	■ ■ ■ ■ ■
3610Z1	4 Alkaline AA	Recoil LED	297/190	84	1	32	II 2 G Ex ib IIB T4	■ ■ ■ ■ ■
3660Z1	4 Nickel Metal Hydrid AA	Recoil LED	299/190	40	1	32	II 2 G Ex ib IIC T4	■ ■ ■ ■ ■
6000	4 Alkaline D	Xenon	1.306/212	126	7	12		■ ■ ■ ■ ■
6050	7 Nickel Cadmium C	Xenon	1.451/212	165	9,6	2		■ ■ ■ ■ ■
1900N	2 Alkaline AAA	Xenon	45/104	7	1,1	2		■ ■ ■ ■ ■
2000N	3 Alkaline C	Xenon	360/198	33	3,3	5		■ ■ ■ ■ ■
2010N	3 Alkaline C	Recoil LED	380/206	65	1	50		■ ■ ■ ■ ■
2400N	4 Alkaline AA	Xenon	200/165	25	3,2	4		■ ■ ■ ■ ■
4100N	8 Alkaline D	Xenon	2.099/238	251	14,4	12		■ ■ ■ ■ ■
4200N	4 Alkaline C	Xenon	662/130	112	6,9	4		■ ■ ■ ■ ■
4300N	8 Alkaline C	Xenon	1.038/190	276	13,8	4		■ ■ ■ ■ ■
9430	12V Rechargeable Sealed Gel Lead Acid (included)	LED	9.800/820*	**1000/2000	24	***15/8	RoHS	■ ■ ■ ■ ■
9450B	1 Rechargeable Sealed Gel Lead Acid (included)	LED	20.870/2.010*	1280	16	***17/9	RoHS	■ ■ ■ ■ ■
9460	12V Rechargeable Sealed Gel Lead Acid (included)	LED	23.000/1.800*	**2000/4000	24 (per head)	***14/7	RoHS	■ ■ ■ ■ ■
9470	12V Rechargeable Sealed Gel Lead Acid (included)	LED	40.000/1.850*	**4000/8000	24 (per head)	***14/7	RoHS	■ ■ ■ ■ ■