


SELECTABLE GALLONAGE NOZZLE



Style 366-K

- Combination pattern nozzle with versatile multiple flow settings.
- Produces straight stream for maximum reach and superb wide fog pattern for optimum fire fighter protection.
- Double fixed and spinning teeth enhances quality and efficiency of fog pattern.
- One-click turn of bumper ring to flashover pattern position.
- Lightweight hardcoat anodized aluminium construction.
- Standard operating pressure at 100 PSI (7 BAR), optional 85 PSI (6 BAR) or 75 PSI (5 BAR).
- Minimal maintenance reflected in robust design, precision machining and quality materials.
- Standard NH inlet or optional BIM / Machino / Storz inlets.
- Compatible with Protek's foam aeration tubes.
- Conforms to all aspects of NFPA 1964 (Spray Nozzles, Shutoffs and Tips).

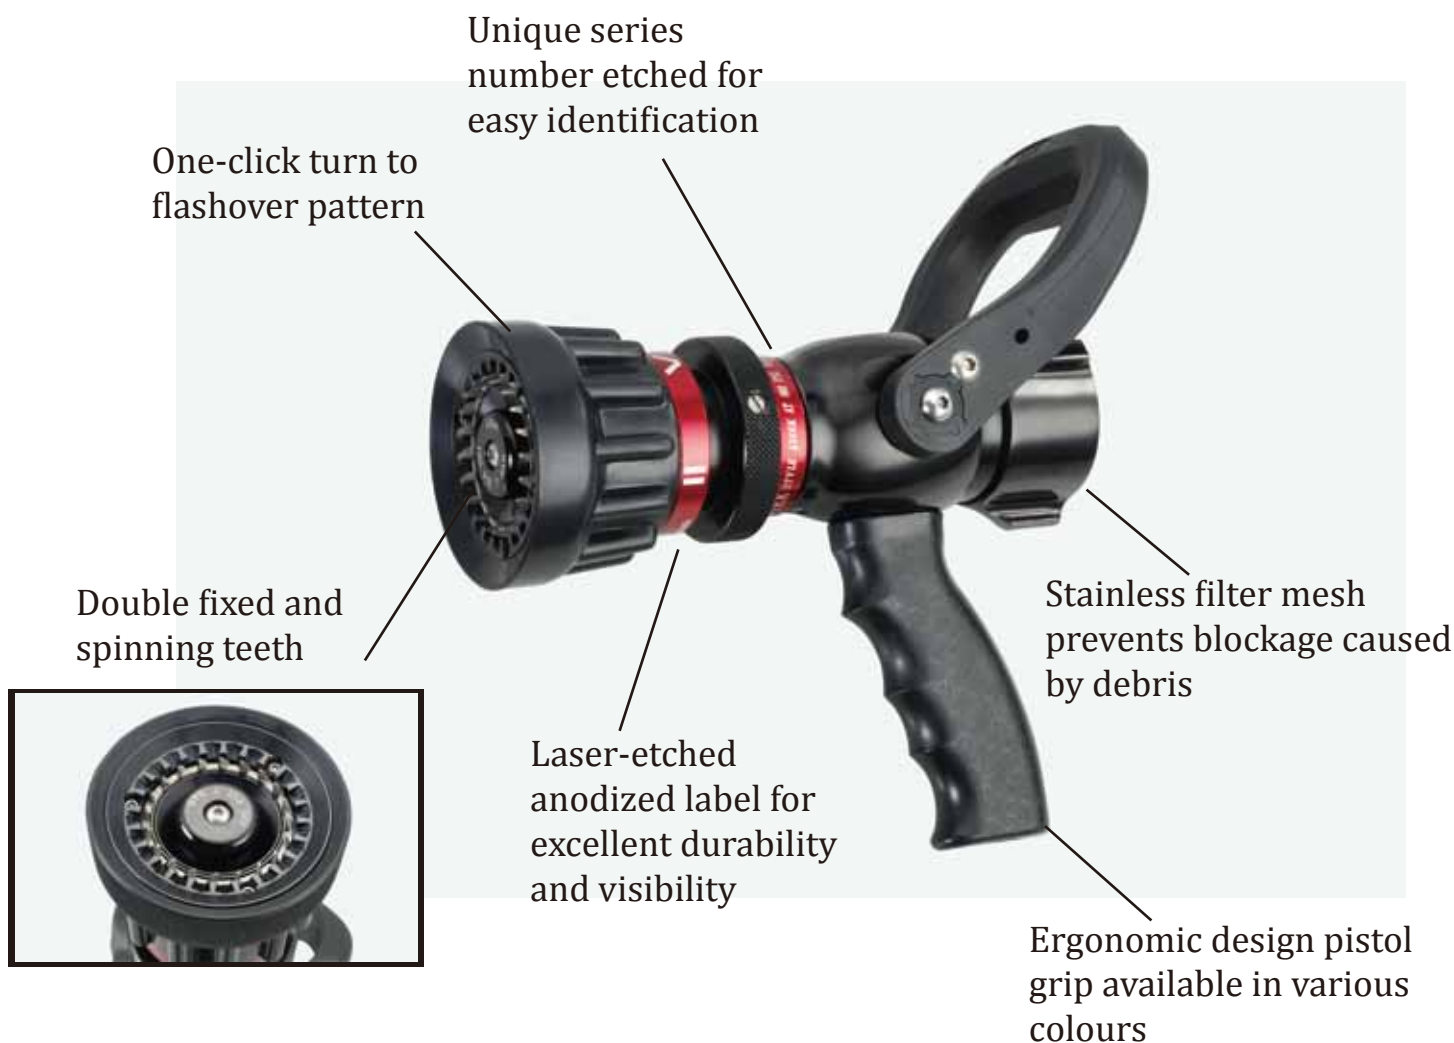

Style	Inlet Size	Length	Weight Lbs (kg)	Flow Settings	
				GPM	LPM
366-K	1-1/2" (38mm)	9" (228mm)	3.9 (1.7)	30-60-95-125	115-230-360-475