


Dual-Purpose Ground Monitors



Style 620 Dual-Purpose Ground Monitor

Style 620 monitor shown with
Style 120 quad stacked tips

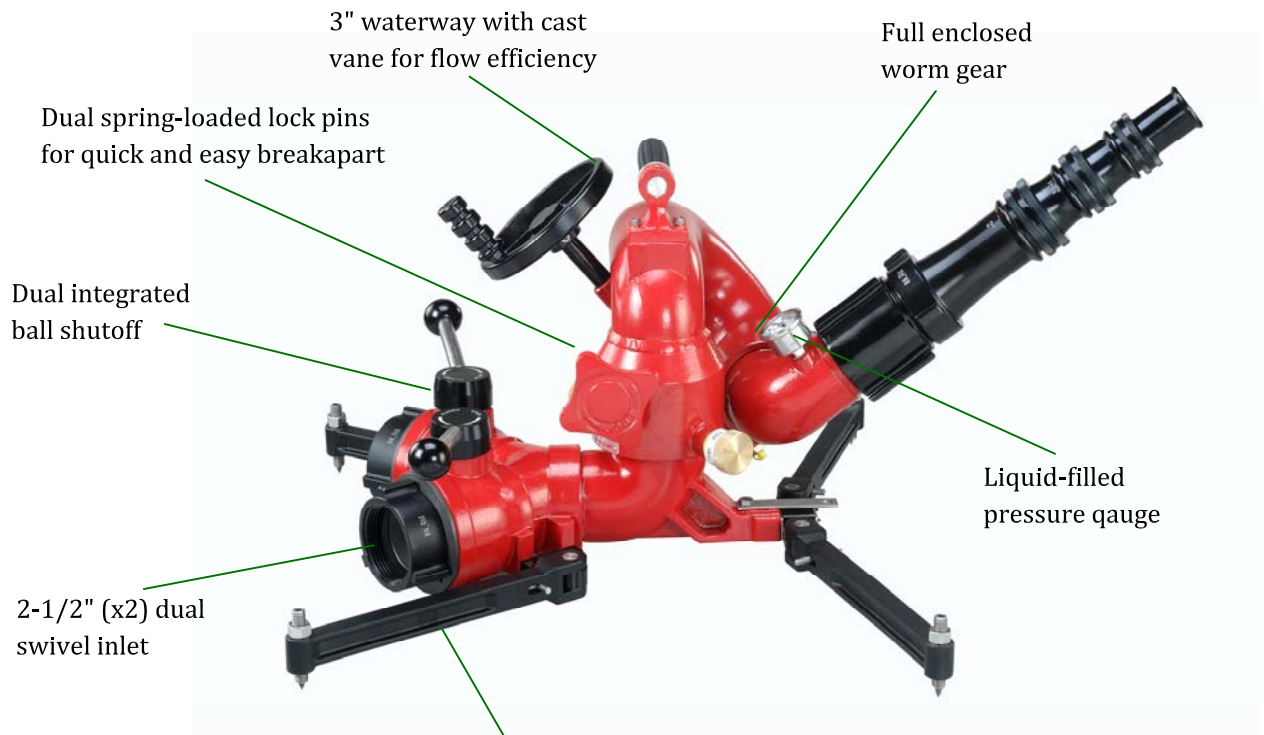

Dual-Purpose Ground Monitors



Style 620 Dual-Purpose Ground Monitor

- Suitable for use as a portable monitor or a deck gun with features to meet the changing demands of the fire service
- Flow rate up to 800 GPM (3030 LPM)
- 3" waterway with cast vane for quality stream
- Full 360° rotation in the deck model, 180° in the portable models
- Vertical travel of 65° from 75° to 10° above with inbuilt 40° safety stop from 55° to 15° above
- Compact folding base can be stored in any truck compartment or pre-connected in the hose bed
- Carbide-tipped spikes for extended resistance to wear
- Large handle for excellent portability
- Fully enclosed worm gear is protected from the elements
- Dual integrated ball shut off enables shut off at both monitor inlet for enhanced control and flexibility
- Compatible with a wide range of Protek nozzles and accessories

Style 620				
Max. GPM (LPM)	800 (3030)		Finish	Red Powder Coating
Inlet	Size	2-1/2" (x2)	Friction Loss	15 psi at 800 gpm
	Type	Thread		12 psi at 750 gpm
Outlet	2-1/2"		Travel	65° Vertical
Control	Single Hand-Wheel			180° Rotation
Material	Alloy		Weight Lbs (kg)	37 (16.8 kg)



Style 656
The pipe



Style 656+620
Quad Stacked Tips



Style 120
Quad Stacked Tips



Style 190
Direct Mount Flange



Style 119
Stream Shaper



Style 847
Monitor Nozzle



Style 887
Self-Educting Nozzle
(500 GPM)



Style 888
Self-Educting Nozzle
(750 GPM)

