


Article No: VMU12110 / 12120

## Unifire V12 Nozzle



The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.

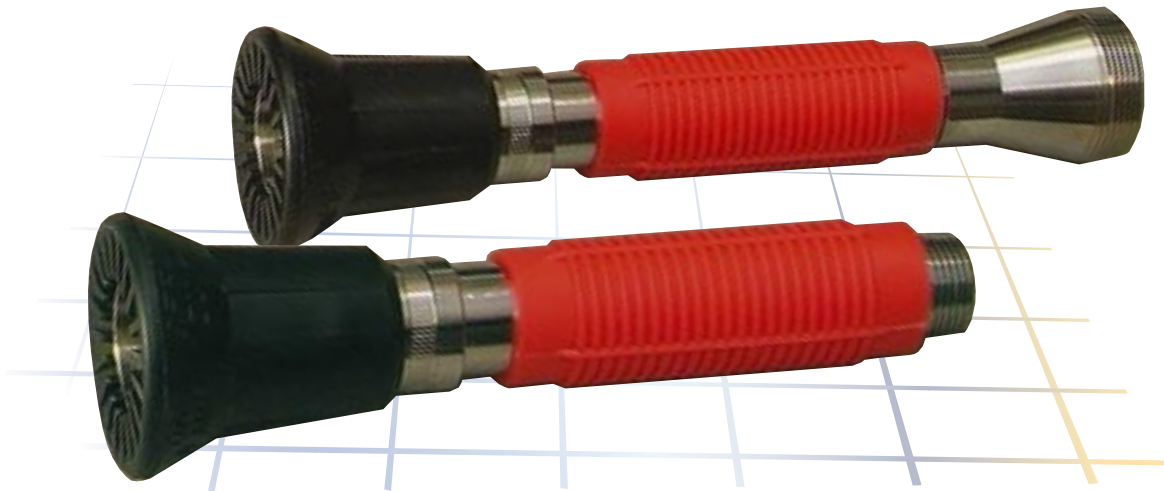

The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

### How to operate

Twist the nozzle head to select spray-pattern  
-Stepless adjustable from shut-off via jet to 90° fog.

### Applications

Fireextinguishing with fog or jet. Proven very reliable. Designed for heavy professional use.

### Operating pressure

2 - 12 Bar

### Material

Chromeplated brass, red plastic cover and rubber bumper head.

### Weight & Measurements (With 2" conn.)

Length: 330 mm  
Nozzle Ø: 80 mm  
Weight: 1.7 kgs

### Connections

1" or 2" BSP Male thread. (Short version 1" female)

### Maintenance / Spareparts

The nozzle is practically maintenance-free. Only spare-part is the baffle and its screw.

### Approvals

Nozzle approved by: Lloyd, Det Norske Veritas, Bureau Veritas, American Bureau of Shipping e.t.c.

### Capacities UNIFIRE V12 nozzle

Pressure Bar	Jet		Fog 90°	
	Flow lpm	Range meters	Flow lpm	Range meters
2	134	22	184	10
6	233	32	325	13
10	302	37	400	14